



ಕರ್ನಾಟಕ ಸರ್ಕಾರ  
ಜಿಲ್ಲಾ ಪಂಚಾಯತ ಬೆಳಗಾವಿ  
ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು

**ಪಂಚಾಯತ್ ರಾಜ್ ಇಂಜಿನಿಯರಿಂಗ್ ವಿಭಾಗ ಚಿಕ್ಕೋಡಿ**

ಕಚೇರಿ ದೂರವಾಣಿ/ಫ್ಯಾಕ್ಸ್ ಸಂಖ್ಯೆ: 08338-272131, Email :preckdee@gmail.com

← ಸೋಂವಾದಿತ್ ಅಂಚೆ ಮೂಲಕ ಪರತ್ ಪಾವತಿಯೊಂದಿಗೆ ರವಾನೆ.  
ಸಂ:ಕಾನಿಅ/ಪಂರಾಇಂ/ಚಿವಿ/ಡಿಬಿ/ವರ್ಕಡನ್/2025-26/ 9602

ದಿನಾಂಕ: 31/3/2026

ಗೆ,  
Executive Engineer,,  
KNNL,G.L.B.C. Dn No:2  
Jamkhandi

ಮಾನ್ಯರೆ,

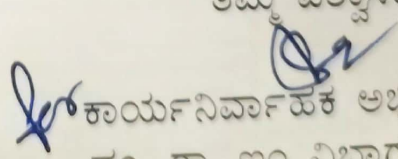
ವಿಷಯ:	ಕಾಮಗಾರಿ ನಿರ್ವಹಿಸಿದ ಪ್ರಮಾಣ ಪತ್ರವನ್ನು ದೃಢೀಕರಿಸುವ ಕುರಿತು.
ಉಲ್ಲೇಖ:	ತಮ್ಮ ಕಚೇರಿ ಪತ್ರ ಸಂಖ್ಯೆ: KNNL/GLBC-2/AB-3/2023-24/19 ದಿ:05-04-2023

= = 0 = =

ಮೇಲ್ಕಾಣಿಸಿದ ವಿಷಯ ಹಾಗೂ ಉಲ್ಲೇಖದನ್ವಯ ಶ್ರೀ. Laxman shivappa gokak at Mugalkhod Tq:Raibag dist:Belagavi ಗುತ್ತಿಗೆದಾರರಿಗೆ ನಿಮ್ಮ ಕಚೇರಿಯಿಂದ ನೀಡಿರುವ ಕೆಲಸ ನಿರ್ವಹಣಾ ಪ್ರಮಾಣ ಪತ್ರವು ಸರಿ ಇರುವ ಬಗ್ಗೆ ದೃಢೀಕರಿಸಿ ಕೂಡಲೇ ಮರಳಿ ಈ ಕಚೇರಿಗೆ ಸಲ್ಲಿಸಲು ಈ ಮೂಲಕ ಕೋರಲಾಗಿದೆ. ಈ ಪತ್ರ ತಲುಪಿದ 7 ದಿನಗಳೊಳಗಾಗಿ ತಮ್ಮಿಂದ ದೃಢೀಕರಣ ಪತ್ರ ಈ ಕಚೇರಿಗೆ ಸಲ್ಲಿಸುವುದು. ನಂತರ ಬಂದ ದೃಢೀಕರಣ ಪತ್ರಗಳನ್ನು ಪರಿಗಣಿಸಲಾಗುವುದಿಲ್ಲ ಅಂತ ವಿನಂತಿಸಲಾಗಿದೆ.

ಅಡಕ: ಮೇಲಿನಂತೆ.

Q. C. Approved by  
Ex. Engineer.

ತಮ್ಮ ವಿಶ್ವಾಸಿಕ,  
  
ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು,  
ಪಂ. ರಾ. ಇಂ ವಿಭಾಗ, ಚಿಕ್ಕೋಡಿ





**KARNATAKA NIRAVARI NIGAM LIMITED**  
(A GOVERNMENT OF KARNATAKA ENTERPRISES)

No/KNNL/GLBC-2/AB-3/2022-23/

Office of the  
Executive Engineer,  
KNNI, GLBC Dn.2 Jamkhandi  
Date : 15 APR 2023

**WORK DONE CERTIFICATE**

Name of work : Asphaltting to Link Road from Athani-Gokak Road to Hidakal-Terdal Road (2.50 Km) (Indent No. 31035)

Agreement No.: PRC/EE/04 For 07/2021 Amount of Contract : Rs. 8609456.06

Date Of Commencement:- 03.07.2021, Due Date Of Completion:- 02.11.2021

Actual Date of Completion : 02.02.2023

(CC approved by CE KNNL Irrigation (N) Belagavi vide letter No. 9064 Dt: 06.03.2023)

This is to certify that Shri Laxman Shivappa Gokak, Contractor, A/p. Mugalkhor Tq: Raibag Dist: Belagavi has executed the above said work with financial out put of Rs. 8601917.00 (Rs. Eighty six lakhs one thousand nine hundred seventeen only) with involving the following items

Sl. No	Description of Items	Unit	Qty executed
1	Clearing and grubbing road land including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth up to 300 mm, removal of stumps of such tree cut earlier and disposal of unserviceable materials and stacking of serviceable materials and stacking of serviceable material to be used or auctioned, up to a lead of 1000 m including removal and disposal of top organic soil not exceeding 150 mm in thickness as per Technical specification clause 201.II(A) By Mechanical Means: A In area of non thorny jungle.	Sqm	0.90
2	Surface Drains in soil, Construction of unlined surface drains of average cross sectional area 0.40 sqm in soil to specified lines, grades, levels and dimensions. Excavated material to be used in embankment with a lift upto 3m and lead upto 50m (average lead 25m) as per Technical Specification Clause 307. (B) Mechanical means.	m	2250.00
3	Compacting Original Ground(i) Compacting original ground supporting embankment Loosening Levelling and Compacting original ground supporting embankment to facilitate placement of first layer of embankment, scarified to a depth of 150mm, mixed with water at OMC and then compacted by rolling so as to achieve minimum dry density as given in Tables 300.1 and 300.2 for embankment.	Cum	2286.56
4	Construction of embankment with material Obtained from Borrow pit Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m transporting to site .spreading, grading to required slope and compacting to meet requirements of table 300.1 and 300.2 with a lead upto 1000 m as per Technical Specification Clause 301.5	Cum	4894.61
5	Granular sub base/base/surface course with local material (Table 400.13) by mix I place method normal construction of granular sub base by providing local material spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at once and compacting with smooth wheel roller to achieve the desired density complete as per clause 401.4 as per Technical Specification clause 408. (i) Using normally occurring gravel.	Cum	1726.17
6	WBM Grading-2 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel 80-100 KN in stages to proper grade and camber, applying and brooming stone screening/binding materials to fill up the interstices of coarse aggregate, watering and compacting to the required density Grading 2 as per technical specification clause 405. a) By Mechanical Means (B) Gr-II	Cum	631.41
7	WBM Grading-3. Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specifications including spreading in uniform thickness, hand packing, rolling with smooth wheel 80-100 KN in stages to proper grade and camber, applying and brooming, stone screening to fill up the interstices of coarse aggregates, watering and compacting to the required density Grading 3 as per technical specification clause 405. a) By Mechanical Means (B) Gr-III	Cum	631.41
8	Prime Coat; Providing and applying primer coat with bitumen emulsion(SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502 Low porosity.	Sqm	8437.50
9	Tack coat, Providing and applying tack coat with bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.25 to 0.30 kg per sqm, on the prepared dry and hungry bituminous surface cleaned with hydraulic broom as per Technical Specification clause 503	Sqm	8437.50
10	Mix seal surfacing. Providing, laying and rolling of close-graded premix surfacing material of 20 mm thickness composed of 13.2 mm to 0.9 mm (Type-1B) aggregates using penetration grade bitumen to the required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 8-10 KN static roller and finishing to required level and grade as per Technical Specification clause 509, By mechanical means	Sqm	8437.50
11	Construction of Subgrade and Earthen Shoulders Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m as per Technical Specification Clause 303.1	Cum	2840.63
12	Kilometre stone Reinforced cement concrete M-15 Grade kilometre stone/local stone of standard design as per IRC : 8 fixing in position including painting and printing etc as per drawing Technical Specification Clause 1703 ii) Ordinary kilometer stone (precast).	No	3.00
13	200 metre stone Reinforced cement concrete M-15 Grade hectometre stone/local stone of standard design as per IRC : 8 fixing in position including painting and printing etc as per drawing Technical Specification Clause 1703 iii) 200 metre stone (precast).	No	9.00
14	Traffic signs A.Retro-reflectorised Traffic signs (i) Providing and fixing of retro reflectorised cautionary, mandatory and informatory sign as per IRC 67 made of encapsulated lense type reflective sheeting vide clause 1701.2.3 fixed over aluminium sheeting, 1.5 mm thick supported on a mild steel angle iron post 75mmx75mmx6mm firmly fixed to the ground by means of properly designed foundation with M 15 grade cement concrete 450mmx450mmx600mm, 600mm below ground level as per drawing and Technical Specification Clause 801 ii) 600m equilateral Triangle	No	3.00

15	Excavation for Structures - Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a load of 50 m, dressing of sides and bottom and back filling in trenches with excavated suitable material	Cum	25.80
16	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 (b) P C C grade M 10 (nominal mix 1:3:6)	Cum	2.90
17	Providing and laying reinforced cement concrete pipe NP 3 for culverts including pointing ends and fixing collars with cement mortar 1:2 including cost of all materials, labour, curing complete as per specifications Specifications No. KSRM1000, 2300MORT Specification No. 1000/2300. 300 mm dia	Rmt	5.00
18	Supplying, Fitting and placing TMT bar reinforcement [ Fe 415] in sub structure complete as per drawing and technical specification, Clauses 1002, 1005, 1010 and 1202.	Tonne	0.20
19	Plain / reinforced cement concrete in sub structure complete as per drawing and technical specifications Clause 802,803,804, 804, 805,806, 807, 1202 & 1204, nominal mix 1:2.5:5 M 15	Cum	10.50
20	Boundary Pillar: Reinforced cement concrete M-15 Grade boundary pillera/local stone of standard design as per IRC : 25 fixed in position including finishing and lettering but excluding painting etc as per drawing Technical Specification Clause 1704.	No	35.00
21	For shifting of Electrical poles and Transformers coming inside the widening pf road (As per HESCOM Estimate).	No	1.00
22	KSRRB MS00-13. Road Marking with Hot Applied Thermoplastic Compound with Reflectrising Glass Beads on Bituminous Surface/ Concrete surface: Providing and laying of hot applied thermoplastic compound 2.5mm thick including reflectorising glass beads at 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 standards specified. The finished surface to be level, uniform and free from streaks and holes complete as per specifications. MORTH Specification No. 803	mtr	450.00

Work is completed satisfactorily

Executive Engineer  
KNNL, GLBC Dn No.2 Jamakhandi

No : KNNL/GLBC-2/AB-3/2023-24/19

5 APR 2023

To, Shri Laxman Shivappa Gokak, Contractor, A/p. Mugalkhod Tq: Raibag Dist: Belagavi As per his application dated :

Executive Engineer

KNNL, GLBC Dn No.2 Jamakhandi